


Overview

HP recommends
Windows Vista® Business


Microtower

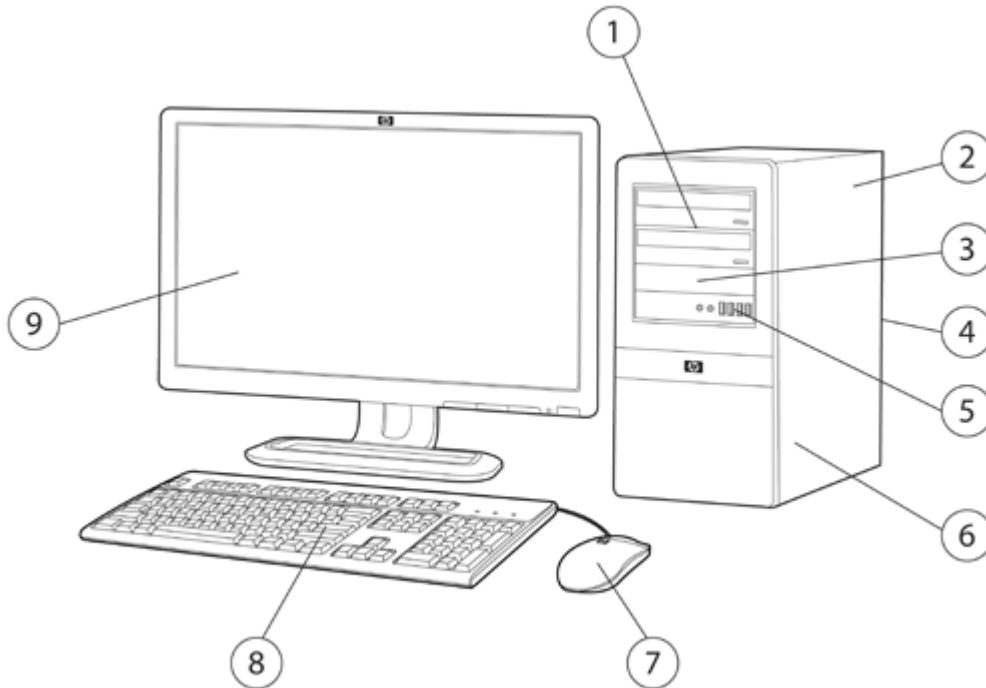

1. (2) external 5.25" drive bays for optional optical drives; (2) internal 3.5" hard drive drive bays
2. 300 watt PFC and non-PFC power supply
3. (1) external 3.5" drive bay for optional media reader or diskette drive
4. Rear I/O: (4) USB 2.0 ports, (2) PS/2, (1) RJ-45, (1) 1394, (1) VGA, (1) DVI, (1) SPDIF in – (1) SPDIF out, (1) audio in – (1) audio out – (1) MIC
5. Front I/O: (3) USB 2.0 ports, (1) MIC – (1) audio out (Headphone), (1) 1394
6. (3) PCIe x1 slots, (1) PCIe x16 2.0slot
7. PS/2 Scroll Mouse
8. HP Standard Keyboard
9. Monitor (sold separately)

Overview

Small Form Factor

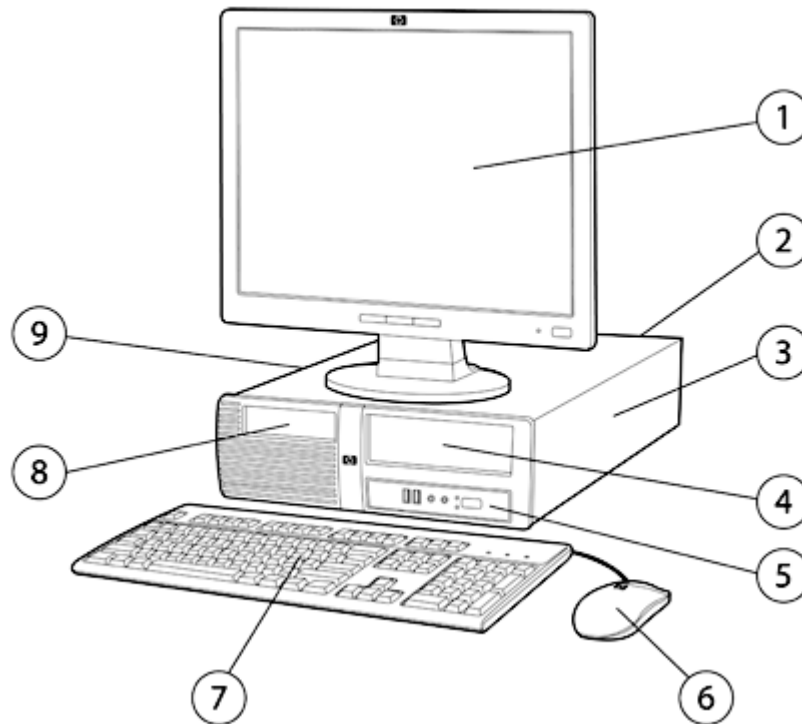

- | | |
|---|--|
| 1. Monitor (sold separately) | 5. Front I/O: (2) USB 2.0 ports, (1) audio in – (1) audio out |
| 2. Rear I/O: (4) USB 2.0 ports, (2) PS/2, (1) RJ-45, (1) 1394, (1) VGA, (1) DVI, (1) SPDIF in – (1) SPDIF out, (1) audio in – (1) audio out – (1) MIC | 6. PS/2 Scroll Mouse |
| 3. 250 watt PFC power supply | 7. HP Standard Keyboard |
| 4. (1) external 5.25" drive bay for optional optical drives; (1) internal 3.5" drive bay | 8. (1) external 3.5" drive bay for optional media reader or diskette drive |
| | 9. (3) PCIe x1 slots, (1) PCIe x16 2.0 slot |

Overview

At A Glance

- Support for Intel® Core™ 2 Duo and Core™ 2 Quad processors, Intel Pentium® dual-core processors, Intel Celeron® processors
- Choice of operating systems:
 - Genuine Windows Vista Business 32
 - Genuine Windows Vista Business 64
 - Genuine Windows Vista Home Premium
 - Genuine Windows Vista Home Basic
 - Genuine Windows Vista Ultimate 32 (English only)
 - Genuine Windows Vista Business with downgrade to Windows XP Professional custom installed
 - FreeDOS (not available in China)
- Intel G45 Express Chipset
- Integrated dual monitor support with VGA and DVI-D connectors
- Integrated 1394 port
- Intel I/O Controller Hub 10 (ICH10R)
- Intel Graphics Media Accelerator X4500HD with DX10 support
- PCI Express I/O bus
- Serial ATA controller
- Intel Integrated WG82567V Gigabit Network Connection
- Choice of hard drives and optical drives
- Can be configured with multiple hard drives in a RAID array
- DDR2 SDRAM system memory
- Protected by HP Services. Terms and conditions vary by country. Certain restrictions and exclusions apply.

Standard Features and Configurable Components

Processor and Speed

One of the following

Intel Celeron Processors:

Intel Celeron 430 Processor (1.8-GHz, 512-KB L2 cache, 800-MHz FSB)

Intel Celeron 440 Processor (2.0-GHz, 512-KB L2 cache, 800-MHz FSB)

Intel Celeron 450 Processor (2.2-GHz, 512-KB L2 cache, 800-MHz FSB)

Intel Celeron Dual-Core Processors

Intel Celeron E1200 Processor (1.6-GHz, 512K L2 cache, 800-MHz FSB)

Intel Celeron E1400 Processor (2.0-GHz, 512K L2 cache, 800-MHz FSB)

Intel Celeron E1500 Processor (2.2-GHz, 512K L2 cache, 800-MHz FSB)

Intel Celeron E1600 Processor (2.4-GHz, 512K L2 cache, 800-MHz FSB)

Intel Pentium Dual-Core Processors:

Intel Pentium E2200 Processor (2.2-GHz, 1-MB L2 cache, 800-MHz FSB)

Intel Pentium E2220 Processor (2.4-GHz, 1-MB L2 cache, 800-MHz FSB)

Intel Pentium E5200 Processor (2.5-GHz, 2-MB L2 cache, 800-MHz FSB)

Intel Pentium E5300 Processor (2.6-GHz, 2MB L2 cache, 800-MHz FSB)

Intel Pentium E5300 (HE) Processor (2.6-GHz, 2MB L2 cache, 800-MHz FSB)

Intel Pentium E5400 Processor (2.70-GHz, 2MB L2 cache, 800-MHz FSB)

Intel Pentium E6300 Processor (2.80-GHz, 2MB L2 cache, 800-MHz FSB)

Intel Core 2 Duo Processors:

Intel Core 2 Duo E7300 Processor (2.66-GHz, 3 MB L2 cache, 1066-MHz FSB)

Intel Core 2 Duo E7400 Processor (2.8-GHz, 3 MB L2 cache, 1066-MHz FSB)

Intel Core 2 Duo E7500 Processor (2.93-GHz, 3 MB L2 cache, 1066-MHz FSB)

Intel Core 2 Duo E7500 (HE) Processor (2.93-GHz, 3 MB L2 cache, 1066-MHz FSB)

Intel Core 2 Duo E7600 Processor (3.06-GHz, 3 MB L2 cache, 1066-MHz FSB)

Intel Core 2 Duo E8400 Processor (3.0-GHz, 6 MB L2 cache, 1333-MHz FSB)

Intel Core 2 Duo E8500 Processor (3.16-GHz, 6-MB L2 cache, 1333-MHz FSB)

Intel Core 2 Duo E8600 Processor (3.33-GHz, 6 MB L2 cache, 1333-MHz FSB)

Intel Core 2 Quad Processors:

Intel Core 2 Quad Q6600 Processor (2.4-GHz, 8 MB L2 cache, 1066-MHz FSB)

Intel Core 2 Quad Q8200 Processor (2.33-GHz, 4 MB L2 cache, 1333-MHz FSB)

Intel Core 2 Quad Q8300 Processor (2.50-GHz, 4 MB L2 cache, 1333-MHz FSB)

Intel Core 2 Quad Q8300 (HE) Processor (2.50-GHz, 4 MB L2 cache, 1333-MHz FSB)

Intel Core 2 Quad Q8400 Processor (2.66-GHz, 4 MB L2 cache, 1333-MHz FSB)

Intel Core 2 Quad Q9400 Processor (2.66-GHz, 6 MB L2 cache, 1333-MHz FSB)

Intel Core 2 Quad Q9550 Processor (2.83-GHz, 12 MB L2 cache, 1333-MHz FSB)

Intel Core 2 Quad Q9650 Processor (3.0-GHz, 12 MB L2 cache, 1333-MHz FSB)

NOTE: Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families.

Standard Features and Configurable Components

Operating Systems and Application Software (availability varies by region)

Genuine Windows Vista Business 32*
Genuine Windows Vista Business 64*
Genuine Windows Vista Home Basic*
Genuine Windows Vista Home Premium*
Genuine Windows Vista Ultimate 32* (English only)
Genuine Windows Vista Business downgrade to Windows XP Professional custom installed*†
Free DOS 1.0 (not available in China)+

Certified:

Red Hat Enterprise Linux+
SUSE Linux Enterprise Desktop+

* Certain Windows Vista product features require advanced or additional hardware. See: <http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx> and <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.

† Windows Vista Business disk may be included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order annually at least 25 customer systems with the same custom image.

+ The following features are not supported by Linux:

- Integrated 1394 port
- Intel Gigabit CT Desktop NIC
- LSI PCIe x1 56K International SoftModem
- HP Wireless 802.11 b/g/n PCIe x1 Card (full height)
- NVIDIA GeForce GT130 768MB PCIe x16 graphics card
- ATI Radeon HD 2400XT 256MB Dual Head graphics adapter (PCIe x16)
- ATI Radeon HD 3470 256MB Single Head graphics adapter (PCIe x16)
- ATI Radeon HD 3650 512MB Dual Head graphics adapter (PCIe x16) (MT only)
- ATI Radeon HD 4650 512MB PCIe x16 graphics card
- DisplayPort to DVI-D adapter (for use with ATI Radeon HD 3470 and 3650)
- Belkin USB to serial adapter
- 22-in-1 Media Reader

Microsoft Office 2007 Basic
Microsoft Office 2007 Small Business
Microsoft Office 2007 Professional
HP Backup and Recovery Manager
Intel Matrix Storage Manager

Mozilla Firefox for HP Virtual Solutions
Roxio Easy Media Creator 10**
Intervideo WinDVD 8**
McAfee Total Protection Anti-Virus***
PDF Complete
AOL Toolbar

** Supporting software available with certain optical drive configurations

*** 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.

Standard Features and Configurable Components

Hard Drives (SATA)

80 GB Hard Drive

8MB cache, 7,200 RPM, 3.0 GB/s, NCQ, Smart IV

160 GB Hard Drive

8MB cache, 7,200 RPM, 3.0 GB/s, NCQ, Smart IV

250 GB Hard Drive

8MB cache, 7,200 RPM, 3.0 GB/s, NCQ, Smart IV

320 GB Hard Drive

8MB cache, 7,200 RPM, 3.0 GB/s, NCQ, Smart IV

500 GB Hard Drive

16MB cache, 7,200 RPM, 3.0 GB/s, NCQ, Smart IV

250-GB Pocket Media Drive

System Memory

512-MB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (1 x 512MB)

1-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (1 x 1GB)

2-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (2 x 1GB)

3-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (3 x 1GB)

4-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (4 x 1GB)

4-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (1 x 4GB)

4-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (2 x 2GB)

8-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (4 x 2GB)

8-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (2 x 4GB)

16-GB DDR2 Synch DRAM PC2-6400 (800-MHz) Non-ECC (4 x 4GB)

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Storage –

One or more of the following (see Storage section below)

Diskette Drive

1.44-MB Diskette Drive

Media Reader

HP 22-in-1 Media Reader and additional USB 2.0 port

Optical Drives (Serial ATA)

SATA DVD-ROM Drive

SATA SuperMulti LightScribe DVD Writer Drive

HP SATA Blu-ray Writer

Standard Features and Configurable Components

Input Devices

Keyboard – One of the following

HP PS/2 Standard Keyboard

HP USB Standard Keyboard

HP USB Smartcard Keyboard

Mouse – One of the following

PS/2 2-Button Optical Scroll Mouse

USB 2-Button Optical Scroll Mouse

USB 2-Button Laser Mouse

Audio

Realtek ALC888S High Definition audio codec

3D audio compliant with AC'97 Rev. 2.3 and HD Audio compatible

Internal PC speaker

Communication

Integrated Intel WG82567V Gigabit Network Connection

Intel Gigabit CT Desktop NIC

LSI PCIe x1 56K International SoftModem

HP Wireless 802.11 b/g/n PCIe x1 Card (full height)

Graphics

Intel Graphics Media Accelerator X4500HD

NVIDIA GeForce GT130 768MB PCIe x16 graphics card (MT only)

NVIDIA GeForce GT230 1.5GB PCIe x16 graphics card

ATI Radeon HD 2400XT 256MB Dual Head graphics adapter (PCIe x16)

ATI Radeon HD 3470 256MB Single Head graphics adapter (PCIe x16)

ATI Radeon HD 3650 512MB Dual Head graphics adapter (PCIe x16) (MT only)

ATI HD 4350 ATX Card (512MB) (SFF only, NA only)

ATI Radeon HD 4550 Dual Head PCIe x16 Graphics Card

ATI Radeon HD 4650 1GB PCIe x16 graphics card (MT only)

DisplayPort to DVI-D adapter (for use with ATI Radeon HD 3470 and 3650)

HP DisplayPort to VGA Adapter

Miscellaneous

Belkin USB to serial adapter

System Details

Base Unit

- MT: Micro ATX Microtower chassis, including power supply and front bezel; five (5) drive bays and four expansion slots
- SFF: Micro ATX Small Form Factor chassis, including power supply and front bezel; three (3) drive bays and four expansion slots
- Active type heatsink
- 92 x 92 x 25 mm chassis fan for Microtower chassis
- No chassis fan for Small Form Factor chassis
- System board with Intel G45 Express chipset, Intel I/O Controller Hub 10R (ICH10R), Intel WG82567V Ethernet controller, Intel GMA X4500HD graphics, and Realtek audio, (3) PCI Express x1 slots, (1) PCI Express x16 2.0 slot, (4) DDR2 DIMM memory slots, (4) Serial ATA data connectors, (10) USB Ports (see USB support below), 1394 Firewire, SPDIF coaxial In/Out
- Power cord

Slots

PCI

PCI Express x1 slots

MT: (3) full-height (4.34"), length (6.6"), Max power per slot 10W
SFF: (3) low-profile (2.73"), length (6.6"), Max power per slot 10W

PCI Express x16 2.0 slot (for graphic cards)

MT: (1) full-height (4.34"), length (9.5"), Max power per slot 75W
SFF: (1) low-profile (2.73"), length (6.6"), Max power per slot 25W

Memory Expansion

Four (4) DDR2 SDRAM DIMM slots (16 GB maximum memory support)

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Bays

Internal

MT: Two (2) 3.5-inch
SFF: One (1) 3.5-inch

External

MT: Two (2) 5.25-inch; One (1) 3.5-inch
SFF: One (1) 5.25-inch; One (1) 3.5-inch

USB Support

EHCI high-speed USB 2.0 controller

MT: Three (3) front ports; four (4) rear ports, three (3) internal ports on system board

SFF: Two (2) front ports; four (4) rear ports, four (4) internal ports on system board

System Details

Other Ports

Front:

MT: (1) audio out; (1) microphone in, (1) 1394 port

SFF: (1) audio out; (1) microphone in

Rear:

(2) PS/2 ports (keyboard and mouse)

(1) analog VGA video port

(1) DVI port

(1) SPDIF coaxial input

(1) SPDIF coaxial output

(1) audio in, (1) audio out; (1) microphone in

(1) RJ-45 network port

(1) 1394 port

Weight & Dimensions (MT)

Chassis Dimensions

(H x W x D)

15.14 x 7.27 x 16.36 in

385 x 185 x 416 mm

Packaged Dimensions

(L x W x H)

19.13 x 21.875 x 10.13 in

490 x 556 x 257 mm

System Weight

22.4 lb (10.2 kg)

Shipping Weight

30.8 lb (14.0 kg)

Weight & Dimensions (SFF)

Chassis Dimensions

(H x W x D)

3.98 x 13.35 x 15.24 in

101 x 339 x 387 mm

Packaged Dimensions

(L x W x H)

23.38 x 19.68 x 9.0 in

593.8 x 500.0 x 228.6 mm

System Weight

14.96 lb (6.79 kg)

Shipping Weight

23.00 lb (10.43 kg)

Technology and Features

Memory Type

PC2-6400 DDR2 SDRAM (800MHz) non-ECC

Up to 16 GB system memory standard

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Hard Drive Interfaces Supported

Serial ATA

System Details

RAID	Redundant Array of Independent Drives RAID 0,1 are the RAID configurations that HP Compaq dx7500 Business PC products offer as factory configurations. The pre-configured systems: • Are only available on the MT form factor. The SFF does not support RAID, as it does not allow for more than one hard disk drive. • Are complete RAID systems and have both drives installed. • Have the necessary Option ROM configuration. • Are pre-loaded and pre-installed with all required Intel software. • Include a preinstalled operating system that is in mirrored mode out of the box.
------	---

SMART Technology* (Self-Monitoring, Analysis and Reporting Technology)	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted • Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count • By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure • IOEDC: I/O Error Detection Circuitry • Detects errors in Read/Write buffers on HDD cache RAM • Interface in F10 setup provides confirmation of SMART support.
---	---

* This feature is inoperable when a RAID configuration is enabled.

Chassis	Front Panel Power button Power On LED HDD Activity LED Cooling Solutions Supported Power Supply Fan (variable speed) Active heatsink (variable speed) Chassis fan (variable speed) (MT only) Slots Supported (3) PCI Express x1 slots, (1) PCI Express x16 slot Front I/O MT: Three (3) USB 2.0 ports, 1394, Headphone, Mic SFF: Two (2) USB 2.0 ports, Headphone, Mic Rear I/O Standard Micro ATX I/O connectors, including four (4) USB 2.0 ports Drive Bays (MT) Two (2) 5.25-inch (13.335 cm) half height external One (1) 3.5-inch (8.89 cm) half height external Two (2) 3.5-inch (8.89 cm) half height internal Drive Bays (SFF) One (1) 5.25-inch (13.335 cm) half height external One (1) 3.5-inch (8.89 cm) half height external One (1) 3.5-inch (8.89 cm) half height internal Internal Speaker Standard Security Padlock loop Support for chassis padlocks and cable lock devices Kensington Lock Support Optional USB Port Disable at factory (user configurable via BIOS) HP Chassis (1 bay - NA) Security Kit
---------	---

System Details

Power Supply

MT: 300-watt ATX Power Supply – PFC/non-PFC with a 115v/230v line switch (varies by country/region)

SFF: 250-watt Power Supply – PFC with a 115/230v line switch.

Unit Environment and Operating Conditions

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 4 in (10.2 cm) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range (MT)	Operating	41° to 95° F (5° to 35° C)
	Non-operating	–22° to 140° F (–30° to 60° C)
Relative Humidity (MT)	Operating	15% to 80% (non-condensing at ambient)
	Non-operating	90% (non-condensing at ambient)
Maximum Altitude (MT) (unpressurized)	Operating	7500 ft (2286 m)
	Non-operating	15,000 ft (4572 m)
Temperature Range (SFF)	Operating	50° to 95° F (10° to 35° C)
	Non-operating	–22° to 140° F (–30° to 60° C)
Relative Humidity (SFF)	Operating	10% to 90% (non-condensing at ambient)
	Non-operating	5% to 95% (non-condensing at ambient)
Maximum Altitude (SFF) (unpressurized)	Operating	10,000 ft (3048 m)
	Non-operating	30,000 ft (9000 m)

NOTE: Operating temperature is de-rated 1.0 deg C per 1000 ft (300 m) to 7500 ft (2286 m) for MT and 10000 ft (3000m) for SFF above sea level, no direct sustained sunlight. Maximum rate of change is 7.5 deg C/Hr for MT and 10 deg C/Hr for SFF. The upper limit may be limited by the type and number of options installed.

System Board

Processor	Socket T; LGA775 industry standard Micro ATX form factor Support single Intel Core 2 Duo and Core 2 Quad, Pentium dual-core, or Celeron processors
PWM	ON – NCP5362 – 3 phase
Chipset	Intel G45 Express Intel I/O Controller Hub 10 (ICH10R)
Super I/O	Fintek F8000
Front Side Bus Frequency	800/1066/1333 MHz
Memory	DDR2 SDRAM 4 x DIMM slots

System Details

Clock Generator	SLG8XP549T
Integrated Graphics	Intel Graphics Media Accelerator (GMA) X4500HD
Audio	Realtek ALC888S HD Audio compatible codec with two channel audio 3D audio compliant with AC'97 rev. 2.3
LOM	Intel WG82567V PHY, Integrated MAC in ICH10R
Storage	Four Serial ATA interfaces
Expansion Slots	3 x PCI Express x1 slots 1 x PCI Express x16 slot
BIOS	SPI FLASH ROM
Industrial Standard	PCIe compliant USB 2.0
Rear Side I/O Ports	1 x PS/2 keyboard port 1 x PS/2 mouse port 4 x USB 2.0 ports 1 x RJ-45 10/100 port 1 x DVI-D port 1 x 1394 port 1 x SPDIF coaxial input port; 1 SPDIF coaxial output port 1 x DB 15-pin analog VGA port 3 x audio ports
On Board I/O Interfaces	1 x ATX power connector 1 x +12V power connector 1 x Floppy connector 1 x Front panel connector, Switch, LED (ON/Flash/OFF) 2 x Fan headers for CPU, chassis, with voltage/fan speed control 2 x header (1 -2x5, 1-1x5) to support 3 USB 2.0 ports at front side 1 x header (1 - 2x5) to support USB Card Media Reader 1 x header (1 -1x5) to support an additional USB device 1 x header to support 2 front (Headphone/Mic) audio ports
Board Size	Micro-ATX, PCB Size: 9.6 x 9.0 in (24.38 x 22.86 cm) 4-layer PCB with green color
Additional Features	Bootable without keyboard, mouse or monitor Keyboard/mouse/USB wake up Support S3, S4 and S5 ACPI status Hardware monitor capability CPU fan speed control

Network Interface	Integrated Intel WG82567V Gigabit Network Connection Intel Gigabit CT Desktop NIC (optional)
-------------------	---

System Details

Wireless	MT: Wireless 802.11b/g/n PCIe Card (full height bracket) SFF: Wireless 802.11b/g/n PCIe Card (half height bracket)		
Power Supply	● MT: ATX Power Supply – Passive PFC ● SFF: Custom Power Supply – Passive PFC ● Passive Power Factor Correction (PFC/NPFC) – with line switch set to 230V – No PFC in 115V line switch position ● 90 to 140VAC, or 180 to 264VAC operating voltage range ● 100 to 127VAC, or 200 to 240VAC rated voltage range ● 50-60 Hz rated line frequency ● 47-63 Hz operating line frequency range ● MT: 300 watt maximum rated power ● SFF: 250 watt maximum rated power ● 80-mm power supply fan – variable speed for optimum acoustics		
Power Conservation 'Energy Saver'	● APM 1.2 support ● Screen blanking ● Hard drive 'Idle' mode ● System Idle mode ● ~2 watt power consumption in ES mode - suspend to RAM (S3) (instantly available PC) ● Processor/Cache memory power-down (S3)		
System Environmental Specs	● Values are subject to change without notification and are for reference only. ● Performance of system, options, and ancillary equipment will vary depending on the system configuration. ● Levels presented do not account for non-HP/Compaq installed hardware.		
Ambient Air Temperature	Operating	MT: Operating 41° to 95°F (5 to 35°C) (Test 0 to 104°F (40°C)); SFF: 50° to 95°F (10° to 35°C) at sea level with an altitude de-rating of 1.0°C per every 1000 ft (300 m) above sea level to a maximum of 10000 ft (3000 m), no direct sustained sunlight. Maximum rate of change is 77°F/Hr (25°C/Hr). The upper limit may be limited by the type and number of options installed.	
	Storage	MT: Storage: 90% RH @ 60°C for 12 hours (Non-condensing) SFF: -22° to 140°F (-30° to 60°C) – Maximum rate of change: 410°F/Hr (210°C/Hr).	
Humidity	Operating	MT: 15% to 80% relative humidity (Rh), 35°C non-condensing SFF: 10% to 90% relative humidity (Rh), 86°F (30°C) maximum wet bulb temperature, non-condensing	

System Details

	Storage	MT: 90% relative humidity (Rh), 60°C for 12 hours, non-condensing SFF: 0 to 10,000 feet (0 to 3048 meters) - This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 1,000 ft/min (304.8 m/min).
Altitude	Operating	MT: 0 to 7,500 feet (0 to 2286 meters) – This value may be limited by the type and number of options installed. SFF: 0 to 10,000 feet (0 to 3048 meters) – This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 1,000 ft/min (304.8 m/min).
	Non-Operating	MT: 0 to 15,000 feet (0 to 4572 meters) SFF: 0 to 30,000 feet (0 to 9,144 meters) – Maximum allowable altitude change rate is 1200 ft/min (365.76 m/min).
Shock	Listed are the levels of shock the product can withstand with No damage being incurred. The values represent peak input acceleration during an 2~3 ms half-sine shock pulse, 11 ms trapezoidal shock pulse.	
	Non-Operating	MT: 35G's (Half-sine Shock) 35G's (Trapezoidal Shock) SFF: 35G's (Half-sine Shock) 40G's (Trapezoidal Shock)
Vibration	Listed are the levels of vibration the product can withstand with No damage being incurred. The values represent a flat random vibration input acceleration profile across the given frequency range.	
	Operating	MT: Random Operating: ~0.21Grms (5-500 Hz) Swept Sine: 0.5g (5-500Hz) 5 min. dwell at 4 resonance's 5Hz to 300Hz, (0.25G's nominal). SFF: Random vibration at 5Hz@0.00025G ² /Hz, 10Hz@0.01G ² /Hz, 100Hz@0.01G ² /Hz, 300Hz@0.00001G ² /Hz 5Hz to 300Hz, (0.25G's nominal).
	Non-Operating	MT: ~2.09Grms (5-500Hz), Non-Operational SFF: Random vibration at 0.008G ² /Hz, 10Hz to 500Hz, (2 Grms nominal).
Acoustic Noise	Listed are the declared A-WEIGHTED SOUND POWER LEVELS (LWAd) and declared average desktop seated operator position A-WEIGHTED SOUND PRESSURE LEVELS (LpAm) when the product is operating in a 73.4°F (23°C) ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
	MT: IDLE (Fixed disk drive spinning) LWAd = 3.7 Bels, Desktop Average LpAm = 25 dBA SFF: IDLE (Fixed disk drive spinning) LWAd = 4.3 Bels, Desktop Average LpAm = 32 dBA	

System Details

MT: FIXED DISK (Random write)	LWAd = 4.0 Bels, Desktop Average LpAm = 30 dBA
SFF: FIXED DISK (Random write)	LWAd = 4.8 Bels, Desktop Average LpAm = 37dBA
MT: CD-ROM (Sequential Reads)	LWAd = 5.2 Bels, Deskside Average LpAm = 42 dBA
SFF: CD-ROM (Sequential Reads)	LWAd = 5.2 Bels, Deskside Average LpAm = 41 dBA

Service and Support

On-site Warranty¹: One-year (1-1-1) limited warranty delivers one year of on-site, next business-day² service for parts and labor and includes free telephone support³ 24 x 7. Global coverage² ensures that any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. One-year onsite and labor are not available in all countries.

¹Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.

²On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

³Technical telephone support applies only to HP-configured Compaq and third-party HP-qualified hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

After-Market Options

Communications	NICs	
	Intel Gigabit CT Desktop NIC (GbE PCIe x1 NIC)	FH969AA
	Wireless LAN	
	HP Wireless 802.11/b/g/n PCIe x1	FH971AA
	Modems	
	LSI PCIe x1 56K International SoftModem	FH970AA
Hard Disk Drives	HP 500-GB SATA 3.0-Gb/s Hard Drive	KW347AA
	HP 320-GB SATA 3.0-Gb/s Hard Drive	FH963AA
	HP 250-GB SATA 3.0-Gb/s Hard Drive	PY278AA
	HP 160-GB SATA 3.0-Gb/s Hard Drive	PY277AA
	HP 80-GB SATA 3.0-Gb/s Hard Drive	PY276AA
Removable Storage Devices	Diskette Drive	
	HP 1.44-MB Internal Diskette Drive	AG295AA
	HP 1.44-MB USB Diskette Drive – External	DC141B
	22-in-1 Media Reader	FX273AA
Input Devices	HP PS/2 Standard Keyboard	DT527A
	HP USB Standard Keyboard	DT528A
	HP 2.4 GHz Wireless Keyboard and Mouse	NB896AA#xxx
	HP USB PS2 Washable Keyboard	VF097AA#XXX
	HP PS/2 2-Button Optical Scroll Mouse	EY703AA
	HP USB 2-Button Optical Scroll Mouse	DC172B
	HP USB 2-Button Laser Mouse	GW405AA
Memory	HP 1-GB PC2-6400 (DDR2 800-MHz) DIMM	AH058AA
	HP 512-MB PC2-6400 (DDR2 800-MHz) DIMM	AH056AA
	HP 2-GB PC2-6400 (DDR2 800-MHz) DIMM	AH060AA
	HP 4-GB PC2-6400 (DDR2 800-MHz) DIMM	FH977AA
Audio	HP Satellite Speakers	ZD929AA

After-Market Options

Graphics	NVIDIA GeForce GT130 768MB PCIe x16 Graphics Card (MT Only)	AR957AA
	NVIDIA GeForce GT230 1.5GB PCIe x16 Graphics Card	VH697AA
	ATI Radeon HD 2400 XT 256MB DH PCIe x16 Graphics Card	KD060AA
	ATI Radeon HD 3470 256MB SH PCIe x16 Graphics Card	FH972AA
	ATI Radeon HD 3650 512MB DH PCIe x16 Graphics Card (MT Only)	KS505AA
	ATI Radeon HD 4550 Dual Head PCIe x16 Graphics Card	AT042AA
	ATI Radeon HD 4650 PCIe x16 Graphics Card (MT only)	AR956AA
	HP DisplayPort To DVI-D Adapter	FH973AA
	HP DisplayPort to VGA Adapter	AS615AA
* 1GB of system memory required. Graphics cards use part of the total system memory to enhance graphics performance.		
Optical Drives	HP SATA DVD-ROM Drive	AH047AA
	HP SATA SuperMulti LightScribe DVD Writer Drive	GF343AA
	HP SATA Blu-ray Writer (carbonite)	AR481AA
	HP SATA Blu-ray Writer (black)	AR482AA
Security	HP Business PC Security Lock Kit	PV606AA
	Security Cable with Kensington Lock	PC766A
	HP USB Smartcard Keyboard	ED707AA
Miscellaneous Accessories	Belkin Serial to USB adapter	EM449AA

Memory

DDR SYNCH DRAM NON-ECC MEMORY

The Intel G45 Express chipset supports non-ECC DDR2 memory up to PC2-6400 (800-MHz). Memory upgrades are accomplished by adding single or multiple DIMMs of the same or varied sizes. This chart does not represent all possible memory configurations.

CAUTION: You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

HP recommends dual-channel symmetric configurations for maximum performance.

For best performance, add the same amount of total memory to each channel and do not mix speeds. For dual-channel symmetric performance, the total amount of memory in each channel must be equal. If speeds are mixed, speed will default to the slowest DIMM.

STANDARD MEMORY

512-MB, 1-GB, 2-GB or 4GB DDR2 SYNCH DRAM


OPTIONAL MEMORY UPGRADES

Supports up to 16-GB of DDR2 SYNCH DRAM. Not all memory configurations possible are represented below.

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

DIMM Size	Slot 1 (Blue)	Slot 2 (Black)	Slot 3 (Blue)	Slot 4 (Black)
512-MB	512-MB			
1-GB	1-GB			
2-GB (dual-channel symmetric)	1-GB	1-GB		
4-GB (dual-channel symmetric)	1-GB	1-GB	1-GB	1-GB
4-GB (dual-channel symmetric)	2-GB	2-GB		
8-GB (dual-channel symmetric)	2-GB	2-GB	2-GB	2-GB
16-GB (dual-channel symmetric)	4-GB	4-GB	4-GB	4-GB


Storage

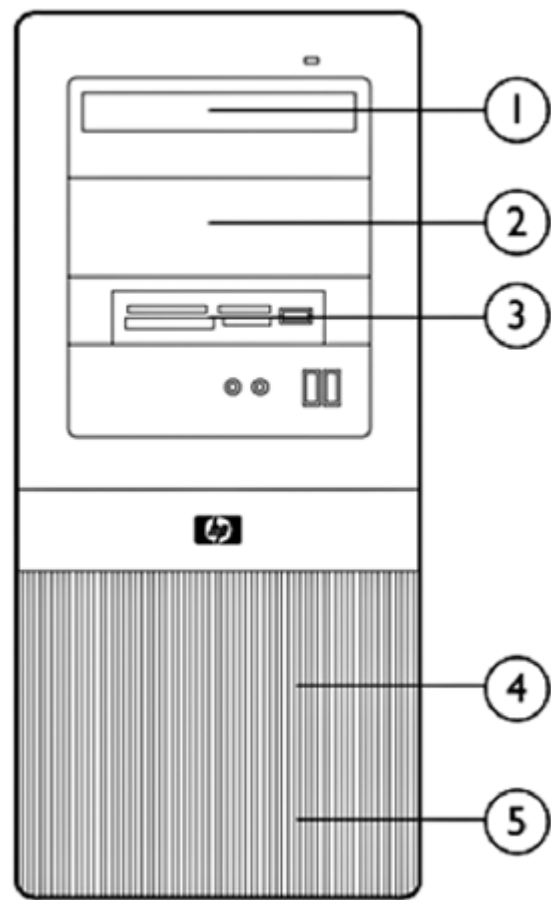

HP Compaq dx7500 Microtower Business PC

	Maximum Quantity Supported	Position Supported	Controller
Drive Support			
Diskette Drives	1	3	SIO
Media Reader	1	3	Internal USB 2.0 port
CD-ROM Drives	2	1, 2	SATA
DVD-ROM Drives	2	1, 2	SATA
DVD+/-RW Drives	2	1, 2	SATA
3.5" Serial ATA Hard Drives	2	4, 5	SATA

Storage

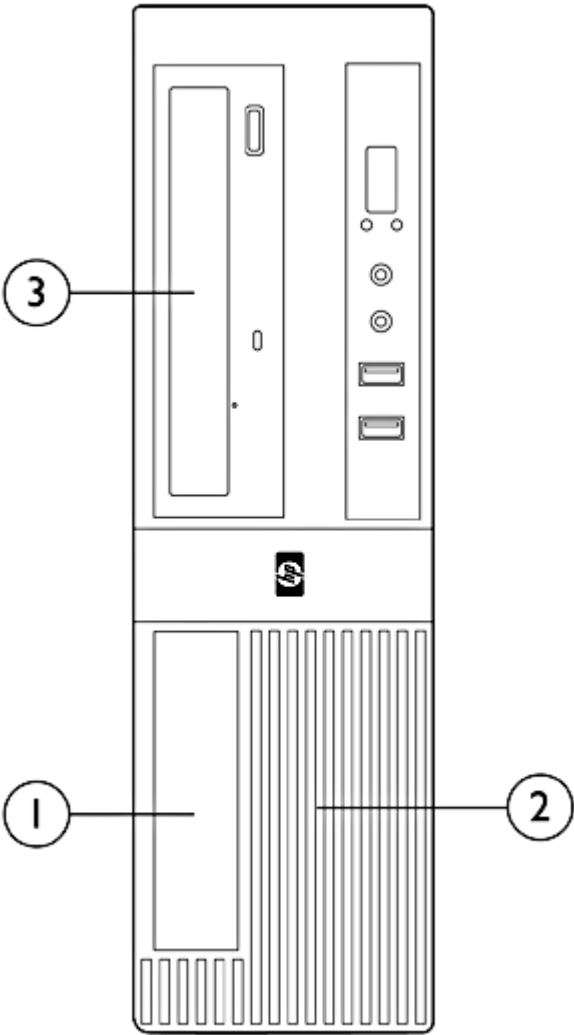

HP Compaq dx7500 Small Form Factor Business PC

	Maximum Quantity Supported	Position Supported	Controller
Drive Support			
Diskette Drives	1	1	SIO
Media Reader	1	1	Internal USB 2.0 port
CD-ROM Drives	1	3	SATA
DVD-ROM Drives	1	3	SATA
DVD+/-RW Drives	1	3	SATA
3.5" Serial ATA Hard Drives	1	2	SATA

Technical Specifications - Audio

Integrated Realtek ALC888S Audio	Type	Integrated	2-channel
	HD Audio compatible	Yes	
	Sampling	Supports 48/96 KHz	
	Audio Jacks	Mic-In	
		Line-In	
		Line-Out / Headphone Out	
	Power Support	Digital: 3.3V	
		Analog: 5V	
	Other	Meets performance requirements for audio on PC99/2001 systems	
		High-performance DACs with 97dB SNR(A-Weighting)	
		ADCs with 90dB NR(A-Weighting)	

Technical Specifications - Communications

Integrated Intel WG82567V Gigabit Network Connection	Connector	RJ-45
	Controller	Intel WG82567V and ICH10R integrated MAC
	Memory	Large 96kb receive and 8kb transmit on chip buffer
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.3 compliant, 802.3x flow control
	Bus architecture	PCI Express 1.1
	Data transfer mode	Bus-master DMA
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	Power requirement	Aux 3.3V, 1.234 Watts in 1000base-T and 0.641 Watts in 100Base-T
	Boot ROM support	Yes
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps
		10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps
		100BASE-TX (full-duplex) 200 Mbps
		1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)
	Environmental	Operating temperature 32° to 120°F (0° to 48.89° C)
		Operating humidity 85% at 120°F (48.89° C)
	Dimensions	68Pin QFN (10mm x 10mm x 0.85mm)
	Management capabilities	WOL, PXE, (WOL supported from S1, S3, S4 states only. Not supported from S5 state).

Intel Gigabit CT Desktop NIC	Connector	RJ-45
	Controller	Intel WG82574L Gigabit Ethernet Controller
	Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCI-E 1.0a
	Data path width	X1, 250 MB/s, Bi-directional interface
	Data transfer mode	Bus-master DMA
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	Power requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
	Boot ROM support	Yes
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps
		10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps
		100BASE-TX (full-duplex) 200 Mbps
		1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)

Technical Specifications - Communications

Environmental	Operating temperature	32° to 131°F (0° to 55° C)
	Operating humidity	85% at 131° F (55° C)
Dimensions	4.75 x 2.25 x 0.8 in (12.1 x 5.7 x 2.0 cm)	
Management capabilities	WOL, PXE, DMI, WFM 2.0	

HP Wireless 802.11b/g/n PCIe	Dimensions (LxH)	3.3 x 4.7 inches (8.5 x 12 cm)		
	Weight	0.08 pounds (40 g)		
	Controller	Ralink RT2790		
	System interface	PCIExpress x1		
	Network standard	802.11 b/g/n		
	Frequency band	2.400 - 2.497 GHz		
	Operating temperature	14° to 149°F, operating (-10° to 65°C, operating)		
	Storage temperature	-40° to 176°F, non-operating (-40° to 80°C, non-operating)		
	Humidity	10-90% operating		
		5-95% non-operating		
	Operating voltage	3.3V +/- 9%		
		12V +/- 8%		
	Power consumption	Platform/WLAN Mode	Power Consumption	
		Maximum Power Consumption	10 Watts	
		Transmit Only	4 Watts maximum averaged power over 1 second	
		Transmit Packet or Active Scanning	1000 mA peak current for 100 microseconds or longer	
		Receive Only Mode or Idle without IEEE PSP mode enabled	3 Watts maximum averaged over 1 second	
		Idle, with IEEE PSP mode enabled	1.0 Watts maximum averaged over 1 second	
		Transmit Disabled (turned off in software)	50 mW maximum, averaged over 1 second	
		Platform in S3 or S4 (power removed from Low Profile PCI Express Card)	5 mW maximum, averaged over 1 second	
		802.11b modes	802.11g modes	EWC modes
		+19 dBm +/- 1.0 dB maximum	+17 dBm +/- 1.0 dB maximum	+17 dBm +/- 1.0 dB maximum (total power in all transmit chains)
	Receive sensitivity	Mode	Data rate	Sensitivity
		802.11b	1 Mbps	-94 dBm
		802.11b	11 Mbps	-85 dBm
		802.11g	6 Mbps	-91 dBm
		802.11g	18 Mbps	-85 dBm

Technical Specifications - Communications

	802.11g	48 Mbps	-75 dBm
	802.11g	54 Mbps	-72 dBm
	EWC (2.4 GHz)	6.5 Mbps	-87 dBm
	EWC (2.4 GHz)	54 Mbps	-82 dBm
	EWC (2.4 GHz)	81 Mbps	-78 dBm
	EWC (2.4 GHz)	162 Mbps	-74 dBm
	EWC (2.4 GHz)	270 Mbps	-68 dBm
	EWC (2.4 GHz)	300 Mbps	-64 dBm
Data transfer rate	Data Rate (MCS)	Minimum Throughput	
	1 Mbps (802.11 b)	700 kbps	
	2 Mbps (802.11 b)	1.4 Mbps	
	5.5 Mbps (802.11 b)	3.5 Mbps	
	11 Mbps (802.11 b)	5.9 Mbps	
	12 Mbps (802.11 g)	6 Mbps	
	18 Mbps (802.11 g)	9 Mbps	
	24 Mbps (802.11 g)	12 Mbps	
	36 Mbps (802.11 g)	18 Mbps	
	48 Mbps (802.11 g)	21 Mbps	
	54 Mbps (802.11 g)	22.5 Mbps	
	6.5 Mbps (20 MHz EWC)	4.5 Mbps	
	13 Mbps (20 MHz EWC)	9 Mbps	
	19.5 Mbps (20 MHz EWC)	13.5 Mbps	
	26 Mbps (20 MHz EWC)	18 Mbps	
	39 Mbps (20 MHz EWC)	27 Mbps	
	52 Mbps (20 MHz EWC)	36 Mbps	
	58.5 Mbps (20 MHz EWC)	40 Mbps	
	65 Mbps (20 MHz EWC)	45 Mbps	
	78 Mbps (20 MHz EWC)	54 Mbps	
	104 Mbps (20 MHz EWC)	72 Mbps	
	117 Mbps (20 MHz EWC)	81 Mbps	
	130 Mbps (20 MHz EWC)	91 Mbps	
	13.5 Mbps (40 MHz EWC)	8 Mbps	
	27 Mbps (40 MHz EWC)	16 Mbps	
	40.5 Mbps (40 MHz EWC)	24 Mbps	
	54 Mbps (40 MHz EWC)	32 Mbps	
	81 Mbps (40 MHz EWC)	48 Mbps	
	108 Mbps (40 MHz EWC)	64 Mbps	

Technical Specifications - Communications

	121.5 Mbps (40 MHz EWC) 72 Mbps
	135 Mbps (40 MHz EWC) 81 Mbps
Security	• IEEE and WiFi compliant 64 / 128 bit WEP encryption • AES: CCM • 802.1x authentication • WPA: 802.1x. WPA-PSK and TKIP • WPA2 certification • IEEE 802.11i • Cisco Certified Extensions, all versions through V5
Antenna	HP part number 497792-001
Certifications	Wi-Fi certified
Certifications for use by country	United States, Canada, Peru, Taiwan

LSI PCIe x1 56K International SoftModem

Data Transmission	Technology speeds: 56,000 Kbps maximum downstream data, controllerless NOTE: 56 Kbps technology refers to download speeds only and requires compatible modems at server sites. Other conditions may limit modem speed. FCC limitations allow a maximum of 53 Kbps during download transmissions.
Data Speeds	(Upload only) 33,600/31,200/28,800/26,400/21,600/19,200/16,800/14,400/12,000/9,600/7,200/4,800/2,400/1,200/300
Data Standards	ITU-T V.90, ITU-T, ITU-T V.34, V.44, V.42, V.42bis21, V.32bis, Bell 212A, and Bell 103
Fax Speeds	14,400/12,000/9,600/7,200/4,800/2,400/1,200/300 b/s
Fax Mode Capabilities	ITU-T T.31 class 1 FAX, V. 17, V.29, V.27ter, and V.21 Channel 2
Error Correction and Data Compression	V.44, 42bis, V.42 and MNP2-5
Power Management	PCI Bus Power Management Interface Specification (PCI-PM) Revision 1.2, Appendix A. D0, D3hot, and D3cold. Wake on Ring state when in D3cold. If the power management event (PME) feature is enabled in D3cold, a modem can wake the system via WAKE# (WAKEN) or beacon. Meets PCI Express 1.1 standard.
Upgradeability	Driver upgradeable for future enhancements
Video	ITU-T V.80 video ready interface
Other	TIA/EIA 602 standard AT command set Integrated DTE interface with speeds of up to 115.2 Kbps, parallel 16550a UART-compatible interface Optional ring wakeup signal
Operating Temperature	32° to 158° F (0° to 70° C)
Operating Humidity	20% to 90%, non-condensing
Power	Requires a 3.3-V auxiliary power rail on PCI express bus Uses only one PCI express load (i.e., one grant/request pair), one shared IRQ, one electrical load

Technical Specifications - Communications

Chipset	LSI SV92EX - Integrated PCI interface with 3.3-V tolerant buffers and CardBus support
Dimensions (L X H)	Complies with PCI express low profile specifications-6.7 x 2.3 in (17.0 x 5.8 cm) and supports high- and low-profile brackets
Connection	Single RJ-11 connector
Other Features	Digital line protection, call progress monitoring via on-board piezo device, support for high profile and low profile brackets, PnP ID support
Safety	UL recognized to UL 1950, 3rd edition (U.S. and Canada); IEC 950 (TUV, NEMKO, DEMKO, SEMKO); CE Mark, EC 950 (TUV, NEMKO, DEMKO, SEMKO, CE mark
EMC	FCC Part 15, IC ES003, EN 55022, 3rd edition, EN 55024, annex A, EN 61000-4-6, EN 61000-4-8
Telecom	FCC Part 68, IC-CS-03 (Canada); Worldwide PTT approvals Not available in Korea or the Republic of South Africa.
Other	The SV92EX device is packaged in a 32-pin micro leadless chip carrier (MLCC). The SV92EX is fully compliant with the PCI Express revision 1.1 specification. WHQL approved; ASPM compliant.

Technical Specifications - Graphics

Integrated Intel Graphics Media Accelerator X4500HD	3D/2D Controller VGA Controller DVI Bus Type RAMDAC Graphics Engine Clock Memory	Microsoft DirectX® 10 based with support for Pixel Shader 3.0 Integrated Integrated PCI Express™ x16 Integrated, 350 MHz 667 MHz Graphics memory is shared with system memory. Graphics memory usage varies depending on the amount of system memory installed, BIOS settings, operating system, and system load. 32 MB is pre-allocated for graphics use at system boot time. Additional memory can be allocated at boot time by the BIOS for PAVP (Protected Audio Video Playback) support for playback of protected video content. For Vista, use of PAVP heavy mode pre-allocates an additional 96MB.
---	--	---

Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.

Windows XP Memory Usage:

Total System Memory (GB)	Total Graphics memory (MB)	Pre-Allocated (MB)	DVMT (MB)
0.5	128	32	96
	256	32	224
1	512	32	480
1.5	768	32	736
=>2.0	1024	32	992

Windows Vista Memory Usage:

Support for DVMT 5.0. The graphics driver will determine DVMT memory. DVMT memory = Total GFX memory – Pre-allocated size and fixed memory = Pre-allocated memory.

HW Video Decode	Full Hardware Accelerated decode for MPEG2 encrypted video; support for PAVP Lite (default) and Heavy (or Paranoid) modes. Full H.264 and VC1 Variable Length Decode Acceleration and Intel Clear Video Technology Support.
Maximum Color Depth	32 bits/pixel
Maximum Vertical Refresh Rate	85 Hz at up to 1920x1440, 75 Hz at 2048x1536. Varies with mode and configuration. See table below.
Multi-display Support	Dual Independent monitor support facilitated via one VGA port and one DVI integrated on the back plane of the system board and presented as part of the rear I/O set of interfaces.
Graphics/Video API Support	Microsoft DirectX® 10, OpenGL® 1.5 (OpenGL® 2.0 available in a driver update)

Resolutions Supported

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP.

Technical Specifications - Graphics

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

HP DisplayPort to VGA Adapter

Connectors	DisplayPort and VGA connector
Adapter length	8 in (20 cm)
Adapter weight	.1 lbs (.06 kg)
Option kit contents	HP DisplayPort to VGA Adapter, documentation
Maximum vertical refresh rate	85 Hz
Display support	162 MHz RAMDAC
Display max resolution	1600x1200

HP DisplayPort to VGA adapter display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP. Using the HP DisplayPort to VGA Adapter may require an update to the graphics driver installed on your system. To install the most up-to-date graphics driver go to: www.hp.com.

Resolution	Max refresh rate
640x480	85
800x600	85
1024x768	85
1280x720	85
1280x1024	85
1440x900	75
1600x1200	60
1680x1050	60
1920x1080	60-R
1920x1200	60-R

NOTE: 60-R denotes reduced blanking timings are used. Not all monitors support reduced blanking timing.

Technical Specifications - Graphics

NVIDIA GeForce GT130 768MB PCIe x16 Graphics Card	Bus type	PCI Express (x16 lanes)	
	Input/Output connectors	DVI-I (DVI port supports dual-link and HDCP) VGA and HDMI	
	Board display options	Supports two displays through any combination of two of the three output ports.	
	Board configuration	Specification	Description
		Graphics Chip	NVIDIA GeForce GT130
		Core clock	550 MHz
		Memory clock	500 MHz
		Frame buffer	768MB DDR2
	Maximum vertical refresh rate	85 Hz	
	Display support	Integrated 400 MHz RAMDAC	
	Display max resolution	2048 x 1536 (analog), 2560x1600 (digital)	

NVIDIA GeForce GT130 768MB PCIe x16 Graphics Controller display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R*
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60**

* Max HDMI resolution is 1080p

** Only supported when using a dual-link DVI connection

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish
Operating systems support	Windows Vista Home Basic 32* FreeDOS Linux® x86 and x86_64 distributions using XFree86® or X.Org**

* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit:
<http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements,

Technical Specifications - Graphics

visit: <http://www.windowsvista.com/systemrequirements>.

** Linux drivers are available from NVIDIA's website and may be available in a Linux distribution. Refer to the Open Source and Linux from HP website (<http://www.hp.com/wwwolutions/linux/products/clients/>) for support information.

Maximum power 70W

Option kit contents

- NVIDIA GeForce GT130 768MB PCIe x16 Graphics Card
- Software CD with graphics drivers
- Warranty documentation

Compliance standards EMC Emissions:
a. CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment

EMC Immunity:
CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.

NVIDIA GeForce
GT230 1.5GB
Graphics Card

Bus type PCI Express (x16 lanes)

Input/Output connectors DVI-I (DVI port supports dual-link and HDCP)
VGA and HDMI

Board display options Supports two displays through any combination of two of the three output ports.

Board configuration	Specification	Description
Graphics Chip		NVIDIA GeForce GT230
Core clock		500 MHz
Memory clock		500 MHz
Frame buffer		1.5GB DDR2

Maximum vertical refresh rate 85 Hz

Display support Integrated 400 MHz RAMDAC

Display max resolution 2048 x 1536 (analog), 2560x1600 (digital)

Resolution	Maximum Refresh Rate (Hz)		
	Analog Connection	Digital Connection	HDMI Connection
640x480	85	60	N/A
800x600	85	60	N/A
1024x768	85	60	N/A
1280x720	85	60	60
1280x1024	85	60	N/A
1440x900	75	60	N/A
1600x1200	85	60	N/A
1680x1050	75	60	N/A
1920x1080	85	60-R*	60
1920x1200	85	60-R	N/A
1920x1440	85	N/A	N/A
2048x1536	75	N/A	N/A
2560x1600	N/A	60**	N/A

Technical Specifications - Graphics

* Max HDMI resolution is 1080p

** Only supported when using a dual-link DVI connection

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish
Maximum power	75W
Compliance standards	<u>EMC Emissions:</u> a. CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment <u>EMC Immunity:</u> CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.

ATI Radeon HD 2400XT (256MB DH) PCIe Graphics Card

Bus type	PCI Express (x16 lanes)										
Maximum vertical refresh rate	85 Hz										
Display support	Integrated 400 MHz RAMDAC										
Display max resolution	1920 x 1200 digital, 2048 x 1536 analog										
Board display options	Supports two displays via included DMS-59 to dual VGA cable or 2 DVI monitors via optional DMS-59 to dual DVI cable kit part number: DL139A. 4-pin mini-DIN S-video connector for TV output										
Board configuration	<table> <tr> <th>Specification</th><th>Description</th></tr> <tr> <td>Graphics Chip</td><td>RV610</td></tr> <tr> <td>Core clock</td><td>650 MHz</td></tr> <tr> <td>Memory clock</td><td>500 MHz</td></tr> <tr> <td>Frame buffer</td><td>256 MB DDR2, 128 bit wide</td></tr> </table>	Specification	Description	Graphics Chip	RV610	Core clock	650 MHz	Memory clock	500 MHz	Frame buffer	256 MB DDR2, 128 bit wide
Specification	Description										
Graphics Chip	RV610										
Core clock	650 MHz										
Memory clock	500 MHz										
Frame buffer	256 MB DDR2, 128 bit wide										
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish										
Core power	21 W										
Compliance standards	<u>EMC Emissions:</u> - FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home & Office Use - CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment - Canadian Standard ICES-003 is equivalent to CISPR22 - Taiwanese Standard BSMI - Japanese VCCI - Australian C-Tick										

Technical Specifications - Graphics

g. Korean (MIC)

EMC Immunity:

CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.

ATI Radeon HD 2400XT (256MB DH) PCIe Graphics Card display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

	Maximum Refresh Rate (Hz)	
	Analog Resolution	Digital Connection
Resolution	85	60
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

* Only supported when using a dual-link DVI or DP connection

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

ATI Radeon HD 3650
(512MB DH) PCIe x16
Graphics Card

Bus type	PCI Express (x16 lanes)	
Maximum vertical refresh rate	85 Hz	
Display support	Integrated 400 MHz RAMDAC	
Display max resolution	2560 x 1600 digital, 2048 x 1536 analog	
Board display options	Supports two displays via included two DisplayPort and one Dual Link DVI-I connectors.	
Board configuration	Specification	Description
	Graphics Chip	RV635
	Core clock	600 MHz
	Memory clock	500 MHz
	Frame buffer	512 MB DDR2, 128 bit wide
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	
Core power	56 W	
Compliance standards	<u>EMC Emissions:</u>	

Technical Specifications - Graphics

- a. FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home & Office Use
- b. CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment
- c. Canadian Standard ICES-003 is equivalent to CISPR22
- d. Taiwanese Standard BSMI
- e. Japanese VCCI
- f. Australian C-Tick
- g. Korean (MIC)

EMC Immunity:

CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.

ATI Radeon HD 3650 (512MB DH) PCIe x16 Graphics Card display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

	Maximum Refresh Rate (Hz)	
	Analog Resolution	Digital Connection
Resolution	85	60
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

* Only supported when using a dual-link DVI or DisplayPort connection

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

Technical Specifications - Graphics

ATI Radeon HD 3470 (256 SH) PCIe Graphics Card	Bus type	PCI Express (x16 lanes)	
	Maximum vertical refresh rate	85 Hz	
	Display support	Integrated 400 MHz RAMDAC	
	Display max resolution	2560 x 1600 digital, 2048 x 1536 analog	
	Board display options	Supports two displays via the DisplayPort and DVI connectors	
	Board configuration	Specification	Description
		Graphics Chip	RV620
		Core clock	750 MHz
		Memory clock	500 MHz
		Frame buffer	256 MB DDR2, 128 bit wide
	Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	
	Core power	22	
	Dimensions	2.71 in x 6.60 in (68.90 mm x 167.65 mm)	
	Compliance standards	<u>EMC Emissions:</u> a. FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home & Office Use b. CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment c. Canadian Standard ICES-003 is equivalent to CISPR22 d. Taiwanese Standard BSMI e. Japanese VCCI f. Australian C-Tick g. Korean (MIC)	
	<u>EMC Immunity:</u> CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.		

ATI Radeon HD 3470 (256MB SH) PCIe Graphics Card display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Technical Specifications - Graphics

	Maximum Refresh Rate (Hz)	
	Analog Resolution	Digital Connection
Resolution	85	60
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

* Only supported when using a dual-link DVI or DisplayPort connection

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

ATI Radeon HD 4550 DH PCIe x16 Graphics Card	Input/Output connectors	DMS-59 S-video connector	
	Board display options	Supports two displays via included DMS-59 to dual VGA cable or 2 DVI monitors via optional DMS-59 to dual DVI cable kit part number: DL139A. 4-pin mini-DIN S-video connector for TV output	
	Board configuration	Specification	Description
		Graphics Chip	RV710
		Core clock	600 MHz
		Memory clock	800 MHz
		Frame buffer	256 MB DDR2, 64 bit wide
	Bus type	PCI Express (x16 lanes)	
	Maximum vertical refresh rate	85 Hz	
	Display support	Integrated 400 MHz RAMDAC	
Display max resolution	1900 x 1200 digital, 2048 x 1536 analog		

ATI Radeon HD 4550 DH PCIe x16 Graphics Card display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP.

Technical Specifications - Graphics

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	N/A

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections.

Languages supported

24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish

Operating systems support

Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows XP Professional or Windows XP Home 32*.

* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

Linux x86 and x86_64 distributions using XFree86 or X.Org**.

** Linux drivers are available from ATI's website and may be available in a Linux distribution. Refer to the Open Source and Linux from HP website: <http://www.hp.com/wwwolutions/linux/products/clients/> for support information.

Core power

21 W

Option kit contents

- ATI Radeon HD 4550 DH PCIe x16 Graphics Card with full height bracket attached
- DMS 59 to dual VGA Y cable
- Software CD with graphics drivers
- Low profile bracket to convert the card for using in a low profile chassis
- Warranty documentation

Compliance standards

EMC Emissions:

- FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home & Office Use
- CISPR22: 1997/EN 55022:1998 – Class B – Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment
- Canadian Standard ICES-003 is equivalent to CISPR22
- Taiwanese Standard BSMI

Technical Specifications - Graphics

- e) Japanese VCCI
- f) Australian C-Tick
- g) Korean (KCC)

EMC Immunity:

CISPR 24:1997/EN 55024:1998 – Information Technology Equipment – Immunity Characteristics – Limits and Methods of Measurement.

ATI Radeon HD 4650 1 GB PCIe x16 Graphics Card	Bus type	PCI Express (x16 lanes)
	Maximum vertical refresh rate	85 Hz
	Display support	Integrated 400 MHz RAMDAC
	Display max resolution	2560 x 1600 digital, 2048 x 1536 analog

ATI Radeon HD 4650 1 GB PCIe x16 Graphics Card display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R*
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60**

* Max HDMI resolution is 1080p

** Only supported when using a dual-link DVI connection

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

Board display options	Supports two displays through any combination of two of the three output ports.	
Board configuration	Specification	Description
	Graphics Chip	RV730Pro
	Core clock	600MHz
	Memory clock	500 MHz
	Frame buffer	1 GB DDR2, 128 bit wide
Maximum power	55 W	
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	

Technical Specifications - Graphics

Operating systems support

Windows Vista Home Basic 32*, FreeDOS

* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

Linux x86 and x86_64 distributions using XFree86 or X.Org**

** Linux drivers are available from ATI's website and may be available in a Linux distribution. Refer to the Open Source and Linux from HP website: <http://www.hp.com/wwwsolutions/linux/products/clients/> for support information.

Option kit contents

- ATI Radeon HD 4650 512MB PCIe x16 Graphics Card
- Software CD with graphics drivers
- Warranty documentation

Compliance standards

EMC Emissions:

a) CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment

EMC Immunity:

CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.

Technical Specifications - Input Devices

HP PS/2 or USB Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
		Weight	2 lb (0.9 kg) minimum
	Electrical	Operating voltage	+ 5VDC $\pm$ 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		ESD	CE level 4, 15-kV air discharge
		EMI – RFI	Conforms to FCC rules for a Class B computing device
	Mechanical	Microsoft PC 99 – 2001	Functionally compliant
		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
		Microsoft PC 99 – 2001	Mechanically compliant
	Environmental	Acoustics	43-dBA maximum sound pressure level
		Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	–22° to 140° F (–30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

HP USB Smartcard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Form factor	USB basic Smart Card keyboard
		Colors	Carbonite/Silver
		Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)
		Weight	2 lb (0.9 kg) minimum
	Electrical	Operating voltage	+ 5VDC $\pm$ 5%

Technical Specifications - Input Devices

Mechanical	Power consumption	100-mA maximum (with four LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
	Languages	30+ available
	Keycaps	Low-profile design
	Switch actuation	55 g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant membrane
Environmental	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
Approvals	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
SMARTCARD function	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, JITC, EMV2000, USB-IF, FIPS 201	
SMARTCARD function	Support	All ISO 7816 smart cards
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)
	Chipset	SCM STCII
	Standard APIs supported	PC/SC, EMV2000, SET
	Power	USB Port
		Short circuit detection (protects smart card and reader) Power supply compliant with ISO7816 and EMV (5V, 60 mA) Supports 3-V and 5-V cards

Technical Specifications - Input Devices

		Power consumption	250-mA maximum draw (50 mA for the keyboard with three LEDs ON and 200-mA maximum startup current using a high-current, 60-mA smart card)	
		Communication	From card	Programmable from 9,600 baud to 115,200 baud
			From computer	Up to 38,400 baud
		Landing mechanism	Contact device	Friction contact
			Card insertions rating	Up to 100,000 insertion cycles
		Interface modes	USB communications through USB port SCM protocol Automatic card insertion/removal detection	
		Reader performance interface	USB connection	
		Electro-magnetic standards	Europe	89/336/CEE guideline
			USA	USAFCC part 15
HP USB PS2 Washable Keyboard	Physical characteristics	Keys	104 (US) Layout, 105 (EU) layout -- depending upon country	
		Dimensions (L x W x H)	17.67x 6.62 x 1.38 in (449 x 168 x 35 mm)	
		Weight	1.7 lb (0.77 kg) minimum	
	Electrical	Operating voltage	+ 5VDC ±5%	
		Power consumption	50-mA maximum (with three LEDs ON)	
		System interface	USB Type A plug connector	
		ESD	CE level 4, 15-kV air discharge	
		EMI - RFI	Conforms to FCC rules for a Class B computing device	
	Mechanical	Microsoft® PC 99 - 2001	Functionally compliant	
		Keycaps	Stepped -profile design	
		Switch actuation	55-g nominal peak force with tactile feedback	
		Switch life	20 million keystrokes	
		Switch type	Contamination-resistant switch membrane	
		Key-leveling mechanisms	For all double-wide and greater-length keys	
		Cable length	7 ft (2.2 m)	
		Microsoft PC 99 - 2001	Mechanically compliant	
	Environmental	Acoustics	43-dBA maximum sound pressure level	
		Operating temperature	50° to 122° F (10° to 50° C)	
		Non-operating temperature	-4° to 149° F (-20° to 65° C)	
		Operating humidity	10% to 95% (non-condensing at ambient)	
		Non-operating humidity	0% to 95% (non-condensing at ambient)	

Technical Specifications - Input Devices

	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
Approvals	UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1, IP66/NEMA4X	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

HP 2-Button Scroll Mouse (PS/2)	Scroll Wheel	8 mm
	Maximum Rotation Speed	30 mm/s
	Switch Type	Light force micro-switch
	Switch Life	1 million operations
	Mechanical Life	Minimum 200,000 revolutions
Environmental	Operating Temperature	50° to 122° F (10° to 50° C)
		–22° to 140° F (–30° to 60° C)
	Non-operating Temperature	–22° to 140° F (–30° to 60° C)
	Operating Humidity	10% to 90% (non condensing at ambient)
	Non-operating Humidity	20% to 80% (non condensing at ambient)
	Operating Shock	40 g, 6 surfaces
	Non-operating Shock	80 g, 6 surfaces
	Operating Vibration	2 g peak acceleration
	Non-operating Vibration	4 g peak acceleration
	Electrical	Operating Voltage
		+ 5VDC $\pm$ 10%
		Power Consumption
		15mA
Mechanical	System Consumption	PS/2 mini-din connector
	ESD	CE level 4, 15 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	PC98	Functionally compliant
	Resolution	400 $\pm$ 20% DPI
	Tracking Speed	10 in/s maximum
	Acceleration	100 in/s
	Switch Actuation	85 g nominal peak force
	Switch Life	1,000,000 operations (using Hasco modified tester)
	Cable Length	2 m
Regulatory Approvals	PC98-99	Mechanically compliant
	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BCIQ, C-Tick	

Technical Specifications - Hard Drives

Serial ATA Hard Drives (7200 rpm)	80 GB	Capacity	80,026,361,856 bytes	
		Height	1 in (2.54 cm)	
		Width	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/s)	
		Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2.0 ms
			Average	11 ms
			Full-Stroke	21 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	156,301,488	
		Operating Temperature	32° to 140° F (0° to 60° C)	
	160 GB	Capacity	160,041,885,696 bytes	
		Height	1 in (2.54 cm)	
		Width	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/s)	
		Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2.0 ms
			Average	11 ms
			Full-Stroke	21 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	312,581,808	
		Operating Temperature	32° to 140° F (0° to 60° C)	
	250 GB	Capacity	250,059,350,016 bytes	
		Height	1 in (2.54 cm)	
		Width	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/s)	
		Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
		Buffer	8 MB	

Technical Specifications - Hard Drives

	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2.0 ms
		Average	11 ms
		Full-Stroke	21 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	488,397,168	
	Operating Temperature	41° to 131° F (5° to 55° C)	
320 GB	Capacity	320,072,933,376 bytes	
	Height	1 in (2.54 cm)	
	Width	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
	Interface	Serial ATA (3.0 Gb/s)	
	Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
	Buffer	8 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2.0 ms
		Average	11 ms
		Full-Stroke	21 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	625,142,448	
	Operating Temperature	41° to 131° F (5° to 55° C)	
500 GB	Capacity	500,107,862,016 bytes	
	Height	1 in (2.54 cm)	
	Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
	Interface	Serial ATA (3.0 Gb/s)	
	Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
	Buffer	8 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2.0 ms
		Average	11 ms
		Full-Stroke	21 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications - Optical Storage

SATA DVD-ROM Drive	Height	5.25-inch, half-height, tray-load	
	Orientation	Either horizontal or vertical	
	Interface type	SATA/ATAPI	
	Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)	
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
	Weight (max)	2.6 lb (1.2 kg)	
	Read speeds	DVD+R/-R/+RW/ -RW/+R DL /-R DL	Up to 8X
		DVD-ROM	Up to 16X
		DVD-RAM	Up to 4X
		CD-ROM, CD-R	Up to 48X
		CD-RW	Up to 32X
Removable Storage - Media Compatibility - DVD-ROM	Media	Read	Write
	CD-ROM	Yes	No
	CD-R	Yes	No
	CD-RW	Yes	No
	DVD-ROM	Yes	No
	DVD-ROM DL	Yes	No
	DVD-RAM	Yes	No
	DVD+R	Yes	No
	DVD+R DL	Yes	No
	DVD+RW	Yes	No
	DVD-R	Yes	No
	DVD-RW	Yes	No
	DVD-R DL	Yes	No
Access times (typical reads, including setting)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)	
	Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)	
	Cache Buffer	2 MB (minimum)	
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s -default)	
Power	Source	SATA DC power receptacle	
	DC Power Requirement	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p	
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum	

Technical Specifications - Optical Storage

Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 90%
	Maximum Wet Bulb Temperature	86° F (30° C)

SATA DVD+/-RW LightScribe Drive

Height	5.25-inch, half-height, tray-load	
Orientation	Either horizontal or vertical	
Interface type	SATA/ATAPI	
Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)	
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
Weight (max)	2.6 lb (1.2 kg)	
Write speeds	DVD+R	Up to 16X
	DVD+RW	Up to 8X
	DVD+R DL	Up to 8X
	DVD-R DL	Up to 4X
	DVD-R	Up to 16X
	DVD-RW	Up to 6X
	CD-R	Up to 48X
	CD-RW	Up to 32X
	Read speeds	DVD-RAM
		Up to 4X
		DVD+R/-R/+RW/ -RW/+R DL /-R DL
		Up to 8X
		DVD-ROM
		Up to 16X
		CD-ROM, CD-R
		Up to 48X
		CD-RW
		Up to 32X
		Access times
		(typical reads, including setting)
	Random	DVD: < 130 ms (typical), CD: < 120 ms (typical)
Power	Full Stroke	DVD: < 240 ms (seek), CD: < 200 ms (seek)
	Source	SATA DC power receptacle
	DC Power Requirement	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 90%
	Maximum Wet Bulb Temperature	86° F (30° C)

HP 16x SATA Blu-ray

Form Factor	5.25-inch, half-height, tray-load
-------------	-----------------------------------



Technical Specifications - Optical Storage

Writer	Orientation	Either horizontal or vertical		
	Interface type	SATA/ATAPI		
	Disc capacity	50 GB DL or 25 GB standard		
	Dimensions (W x H x D)	5.9 x 1.7 x 7.5 in (15.0 x 4.4 x 19.0 cm)		
	Weight (max)	2.0 lb (907g)		
Write speed	BD-R BD-RE DVD-R DVD-RW DVD+R DVD+RW DVD-RAM CD-R CD-RW	Single-layer		Double-layer
		2x, 4x CLV, 6x CAV		2x, 4x CLV
		2.3x		2x CLV
		2x, 4x CLV, 8x ZCLV, 8x, 12x PCAV, 16x CAV		2x, 4x CLV
		1x, 2x, 4x, 6x CLV		Not supported
		2.4x, 4x CLV, 8x ZCLV, 8x, 12x PCAV, 16x CAV		2.4x, 4x CLV
		2.4x, 4x, 6x CLV, 8x ZCLV		Not supported
		2x, 3x CLV, 3-5x PCAV		
		8x, 16x CLV, 24x, 32x PCAV, 40x CAV		
		4x, 10x, 16x CLV, 24x ZCLV		
		Single-layer		Double-layer
		6x CAV		4.8x CAV
		6x CAV		4.8x CAV
		4.8x CAV		4.8x CAV
		16x CAV		8x CAV
		12x CAV		8x CAV
		10x CAV		Not support
		12x CAV		8x CAV
		10x CAV		Not support
Read speeds	BD-ROM BD-R BD-RE (SL/DL) DVD-ROM DVD-R DVD-RW DVD+R DVD+RW BDMV (AACs Compliant Disc) DVD-RAM DVD-Video (CSS Compliant Disc) CD-R/RW/ROM CD-DA (DAE) 80 mm CD	4.8x CAV		
		2x, 3x CLV, 3x-5x PCAV		
		8x CAV		
		40x / 40x / 40x CAV		
		32x CAV		
		16x CAV		
		215.79 Mbits/s (6x) max.		
		16.62 Mbytes/s (16x) max.		
		6,000 KB/s (40x) max.		
		1.5Gbps bits/s (10b side) 1.2Gbps bits/s (8b side)		
Sustained Transfer rate	BD-ROM DVD-ROM CD-ROM			
Burst Transfer rate				
Multimedia MPC-3 compliant				
		Yes		

Technical Specifications - Optical Storage

Access times (typical reads, including setting)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)
	Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)
	Source	SATA DC power receptacle
	DC Power Requirement	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
Power	DC Current	5 VDC -1000 mA typical, 1600 mA maximum 12 VDC -600 mA typical, 1400 mA maximum
	Environmental (all conditions non-condensing)	
	Temperature (operating)	41° to 122° F (5° to 50° C)
	Relative Humidity (operating)	10% to 90%
Operating systems supported	Maximum Wet Bulb Temperature (operating)	86° F (30° C)
	Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. No driver is required for this device. Native support is provided by the operating system.	
	* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor. For Windows Vista system requirements, visit: http://www.windowsvista.com/systemrequirements.	
	Option kit contents	HP 16x SATA Blu-ray Writer drive, the appropriate SATA cable for the drive, LightScribe software, Roxio Creator Business HD version 9, Corel WinDVD BD Software, installation guide, and DVD+R media.

Technical Specifications - Removable Storage

HP 1.44-MB Diskette Drive	Size	3.5 in (8.89 cm)
	LED Indicators (front panel)	Green
	Read/Write Capacity per Diskette (high/low)	1.44 MB/720 KB
	Drive Height	One-third
	Drive Rotation	300 rpm
	Transfer Rate (high/low)	500/250 KB/s
	Bytes/Sector	512
	Sectors/Track (high/low)	18/9
	Tracks/Side (high/low)	80/80
	Access Times	Track-to-Track (high/low)
		3/6 ms
		Average (high/low)
		94/173 ms
	Settling Time	
	15 ms	
	Latency Average	
	100 ms	
	Cylinders (high/low)	80/80
	Read/Write Heads	Two
HP 22-in-1 Media Card Reader	USB interface	USB 2.0 High-speed device via PCI card or pass -through via internal USB port of system board
	Advance protocol support	• Supports hardware ECC (Error Correction Code) function • Supports hardware CRC (Cyclic Redundancy Check) function • Supports MS 4-bit parallel transfer mode • Supports MS-PRO 4-bit parallel transfer mode • Supports SD 4-bit parallel transfer mode • Supports high-speed 50 MHz SD 4-bit card (version 1.1) • Support high-speed 52 MHz MMC 8-bit card (version 4.x)
	Supported media types	• Supports CompactFlash Card Type I (CF I), CompactFlash Card Type II (CF II), MicroDrive (MD) • Supports 3.3V SmartMedia Card (SM), SmartMedia ROM (SM ROM), xD-Picture Card (xD) • Supports Secure Digital Card (SD), Secure Digital ROM Card (SD ROM), miniSD, MultiMediaCard (MMC), Secure MultiMediaCard (Secure MMC), ROM Type MultiMediaCard (MMC ROM), Reduced Size MultiMediaCard (RS MMC), MultiMediaCard 4.0 (MMC Plus), Reduced Size MultiMediaCard 4.0 (MMC Mobile) • Support Memory Stick (MS), Memory Stick ROM (MS ROM), MagicGate Memory Stick (MG), Memory Stick Select, Memory Stick Duo (MS Duo), Memory Stick PRO (MS-PRO), Memory Stick PRO Duo (MS PRO Duo)
	Mechanical	Length (3.5")
		124.7 cm
		Width (3.5")
		101.6 cm
		Height (3.5")
		25.4 cm

Technical Specifications - Removable Storage

Environmental	Length (5.25")	171.6 cm
	Width (5.25")	148.9 cm
	Height (5.25")	42.7 cm
	Operational environmental extremes	Test Parameters/Conditions – Power applied, unit operating on system $\pm 5\%$ nominal supply voltage. 10°C 10% R.H. = 24 hours 10°C 90% R.H. = 24 hours 20°C 90% R.H. = 24 hours 30°C 90% R.H. = 24 hours 40°C 90% R.H. = 24 hours 50°C 90% R.H. = 24 hours 50°C 10% R.H. = 24 hours
	Storage environmental extremes	Test Parameters/Conditions 60°C @ 80% R.H. for 96 hours -30°C @ 20% R.H. for 48 hours No power applied Delta °C < 1.0°C/min Delta % R.H. < 1.5% R.H./min
Approvals	USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0, Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.2 FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUV-T	

Technical Specifications - Environmental Data

Eco Data

Microtower

Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks

- IT ECO declaration
- Korea Eco-label

System Configuration

The configuration used for the Energy Consumption data for the Microtower model is based on a typically configured product.

Energy Consumption

(in accordance with US

Energy Star test method)

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation	57.89W	57.53W	56.08W
Sleep	4.53W	4.73W	4.73W
Off	1.33W	1.12W	1.15W

Heat Dissipation*

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation	198 BTU/hr	197 BTU/hr	192 BTU/hr
Sleep	16 BTU/hr	16 BTU/hr	16 BTU/hr
Off	5 BTU/hr	4 BTU/hr	4 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Additional Information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

Display meets the requirement for low frequency electromagnetic fields per MPR-II and prEN50279 A/B/C

This product contains 0% recycled materials (by wt.)

This product is 93.0% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - Corrugated 2260g
 - Wood 13000g
 - Polyethylene low density 130g
- Internal:

Technical Specifications - Environmental Data

Small Form Factor

Eco-Label Certifications & declarations This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration

NOTE: This product conforms to the examination standards (2003 version) under JEITA's 'PC Green Label System.'

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Small Form Factor Desktop model is based on a typically configured product.

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	72.198W	72.765W	71.914W
Sleep (Energy Star low power mode)	4.1955W	4.2572W	4.1615W
Off	1.8114W	1.9834W	1.8649W
Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	247 BTU/hr	249 BTU/hr	246 BTU/hr
Sleep	14 BTU/hr	15 BTU/hr	14 BTU/hr
Off	6 BTU/hr	7 BTU/hr	6 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWA _d , bels)	Sound Pressure (LpA _m , decibels)
Idle	4.3	33
Fixed Disk (random writes)	4.4	34
Optical Drive (sequential reads)	4.3	5.2

Batteries

This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000ppm by weight.

Technical Specifications - Environmental Data

Additional Information

Battery size: CR2032 (coin cell)

Battery type: Lithium

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the <level> level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 0% recycled materials (by wt.)
- This product is 92.4% recyclable when properly disposed of at end of life.

Packaging Materials

- External:
 - Polyethylene low density 17.02 g
 - Wood(pallet) 13360g
 - Corrugated Carton 1650 g
- Internal:
 - EPE-Expanded Polyethylene 60.00 g
- The EPE foam packaging material is made from 100% recycled content.
- The corrugated paper packaging materials contains at least 80% recycled content.

Microtower, Small Form Factor

RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde

Technical Specifications - Environmental Data

- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment: Global Citizenship Report
<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>
Eco-label certifications
<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>
ISO 14001 certificates:

Technical Specifications - Environmental Data

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

© Copyright 2009 Hewlett-Packard Development Company, L.P.
All rights reserved.

The information contained herein is subject to change without notice.

Intel and Pentium are U.S. registered trademarks of Intel Corporation. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.